



Ac series for FCU / VRV

This series fits FCU / VRV air-conditioning system which is designed in module-mode and can be installed in the air pipe behind the existing dust filter, thus the general maintenance of the dust filter would not be interrupted. In case of facilitating the maintenance of air handling unit, the “speedy assembly frame” is the best option for you to easily put up and pull down the air purifier module.

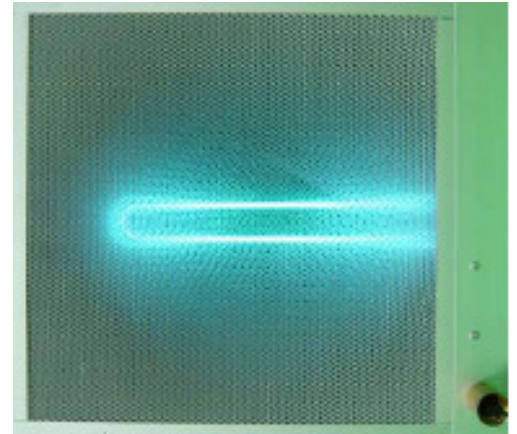

The size of the air purifier is tailor-made and so it is easy to adapt onto the existing air-conditioning system. The module works under low-voltage 12V DC.

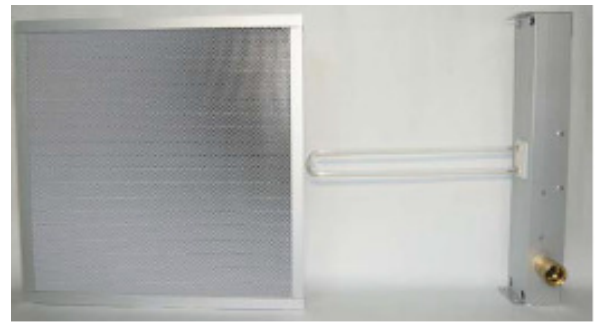

Specifications

Layer of tiox net	2
Number of UV lamp	2-8 pcs.
Suggested air flow	2.5 m/s (max)
Anti-bacteria rate	96.5%
Formaldehyde purification rate	82%
TVOC purification rate	>98%
Power consumption	10W – 50W
Adaptor i/p voltage	AC 100 / 230v 50/60 hz
Adaptor O/P Voltage	DC 12V / 200W
UV Lamp Life Time	10,000 hours
TiO2 net life time	10 years
Dimension (L/H/T)	Tailor made with thickness 53 mm